

Guided-wave photonics for narrowband polarization entanglement

F. Kaiser, A. Issautier, O. Alibart, A. Martin, and S. Tanzilli*

*Laboratoire de Physique de la Matière Condensée, CNRS UMR 7336,
Université de Nice – Sophia Antipolis, Parc Valrose, 06108 Nice Cedex 2, France*

We report on a general entangling scheme, based on a birefringent delay line, capable of creating any pure polarization entangled state. We apply this scheme to a two-photon source built around a high efficiency type-0 non-linear integrated waveguide producing telecom photon pairs. The use of a phase-shifted fiber Bragg grating filter having a bandwidth as narrow as 540 MHz, and additional standard telecommunication components permits achieving a near-perfect entanglement quality associated with a very high brightness, comparable to that of time-bin sources. Such a scheme and source could be used in quantum information applications requiring narrowband photons, especially those involving the manipulation of entanglement via quantum memories and repeaters.

PACS numbers: 03.67.-a, 03.67.Bg, 03.67.Hk, 42.50.Dv, 42.65.Lm, 42.65.Wi

Entanglement exhibits strong correlations that cannot be described using classical means. Besides being at the heart of fundamental tests of quantum physics, these non-local correlations have been identified to be a key resource for modern quantum information protocols [1]. In the field of entanglement-based quantum communication, we now find a variety of network enabling protocols, ranging from the basics of quantum key distribution [2] to quantum relays [3] and repeaters [4]. In principle, entanglement carriers and associated quantum observables do not matter in those protocols. Photons and ions or atoms are now widely recognized as preferred carriers when the tasks concern the distribution over some distance [5] and the storage [6] of quantum information (so-called qubits), respectively. From the general perspective, manipulating qubits is achieved using various technologies and systems, such as integrated photonic circuits [7], ion and atom traps [8, 9], or Josephson junctions [10]. The future of quantum information science probably lies in the coupling some of those technologies.

As in classical communication, the existence of low-loss optical fibers and reliable components based on guided-wave technologies makes it possible to generate and distribute photonic entanglement in the telecom C-band of wavelengths (1530 - 1565 nm). Well utilized observables are time-bin and polarization [1], the latter being undoubtedly the easiest to analyze even for long distance distribution thanks to real time fiber birefringence fluctuation compensation [11]. Moreover heralded quantum memories are naturally designed for the polarization observable [12]. Photonic entanglement can be easily produced using the nonlinear process of spontaneous parametric down conversion (SPDC), in both bulk or waveguide crystals, possibly surrounded by an optical cavity. In quantum networks, where telecom photons are used to distribute, and quantum memories to store, entanglement [4], the photonic spectral bandwidth has to be matched with the spectral acceptance of the employed memories, which ranges, depending on the system, from a few MHz to a few GHz [6]. Note that coherent

wavelength adaptation between 'flying' and 'stationary' qubits, in and out of the memories, can be easily provided by means of efficient frequency conversion systems, using either non-linear optics [7] or cold atoms [13].

As shown in TABLE I, although SPDC based narrowband polarization entangled photon-pair sources already exist, using either high finesse cavity optical parametric oscillators (OPO) [14, 15] or single pass bulk crystals [16], time-bin like solutions provided, up to now, much better ease of use and normalized brightnesses thanks to waveguide configurations [17, 18]. Research on quantum dots has shown, in principle, the feasibility of on-demand polarization entanglement sources, associated however with non-perfect quantum state coherence due to environmental influences [19]. The approach based on alkaline cold atomic ensembles has shown polarization entanglement combined with good brightnesses and ultra narrowband photons, at the price of a large equipment [13, 20, 21].

In this paper, we report a practical and reliable guided-wave scheme for engineering narrowband polarization entangled states. Our approach, inspired by Ref. [22], takes advantage of a fibered birefringent delay line (BDL) that acts on paired photons regardless of their initial, but known, polarization state. In our configuration, playing with the BDL length and the input state makes it possible manipulating photons as narrow as few tens of MHz and producing, at will, any of the four Bell states as well as non-maximally entangled states [23, 24]. We apply this scheme to a high-brilliance, narrowband (540 MHz), telecom photon-pair source and demonstrate a near-perfect quality entanglement, making our approach a promising candidate for future quantum networks. In the following, we first introduce the BDL scheme. Then we depict our source built around a periodically poled lithium niobate waveguide (PPLN/W) followed by a fiber Bragg grating filter. Eventually, we describe the performed quantum state analysis and associated results.

The essential idea is depicted in FIG. 1, where we take advantage of a BDL in order to separate temporally the H and V polarization modes of an incident

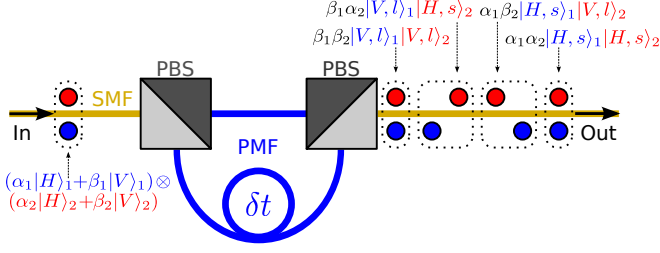


FIG. 1. Principle of the birefringent delay line. An incoming pair of photons is projected on four possible outcomes labeled a to d . Selecting only pairs of photons with zero relative time delay (a and b) projects the quantum state onto a superposition of $|H\rangle_1|H\rangle_2$ and $|V\rangle_1|V\rangle_2$. The frequency modes 1 and 2 are indicated by their colors, red and blue, respectively.

photon-pair by a time interval δt . More generally, such a BDL can be made of a polarization maintaining fiber (PMF) loop connecting two of the adjacent ports of a polarizing beam-splitter (PBS). As a first example, consider at the BDL input a pure polarization two-qubit product state $\frac{1}{\sqrt{2}}(|H\rangle_1 + |V\rangle_1) \otimes \frac{1}{\sqrt{2}}(|H\rangle_2 + |V\rangle_2) = |D\rangle_1|D\rangle_2$. The subscript i denotes the two photons, that could for example differ in wavelength. After the BDL this state becomes $|\psi\rangle_{\text{out}} = \frac{1}{\sqrt{2}}(|H, s\rangle_1 + e^{i\phi_1}|V, l\rangle_1) \otimes \frac{1}{\sqrt{2}}(|H, s\rangle_2 + e^{i\phi_2}|V, l\rangle_2)$ where s and l denote short and long temporal modes, respectively, separated by δt with a relative phase difference ϕ_i . Post selection of events belonging to the same temporal mode reduces this state to $|\psi_{\text{post}}\rangle = \frac{1}{\sqrt{2}}(|H, s\rangle_1|H, s\rangle_2 + e^{i\phi}|V, l\rangle_1|V, l\rangle_2)$, where $\phi = \phi_1 + \phi_2$. As in time-bin realizations [18], δt should be much greater than both the coherence time of the paired photons and the detectors' timing jitter, to prevent temporal overlap between pairs projected onto parallel and cross polarizations (see FIG. 1). Moreover, the incident pairs temporal incertitude has to be substantially greater than δt to guarantee that the photons' arrival time cannot be associated with the polarization state. Provided these conditions are fulfilled, a maximally entangled state of the form $|\psi\rangle = \frac{1}{\sqrt{2}}(|H\rangle_1|H\rangle_2 + e^{i\phi}|V\rangle_1|V\rangle_2)$ can be created, which is at the heart of most quantum communication applications. To show the power of this entanglement scheme, assume now the most general photonic two-qubit product state at the BDL input $|\psi\rangle_{\text{in}} = (\alpha_1|H\rangle_1 + \beta_1|V\rangle_1) \otimes (\alpha_2|H\rangle_2 + \beta_2|V\rangle_2)$, where $|\alpha_i|^2 + |\beta_i|^2 = 1$. In this case the post selection procedure in combination with the timing requirements described above, projects the state onto $|\psi\rangle = \alpha|H\rangle_1|H\rangle_2 + \beta e^{i\phi}|V\rangle_1|V\rangle_2$, where $\alpha = \frac{\alpha_1\alpha_2}{\sqrt{|\alpha_1\alpha_2|^2 + |\beta_1\beta_2|^2}}$ and $\beta = \frac{\beta_1\beta_2}{\sqrt{|\alpha_1\alpha_2|^2 + |\beta_1\beta_2|^2}}$. Consequently, this scheme is capable of creating any two photon polarization entangled state, expressed as superpositions of $|\Phi^+\rangle$ and $|\Phi^-\rangle$ Bell states. This is made possible since the three parameters α , β , and ϕ are accessible experimentally, namely

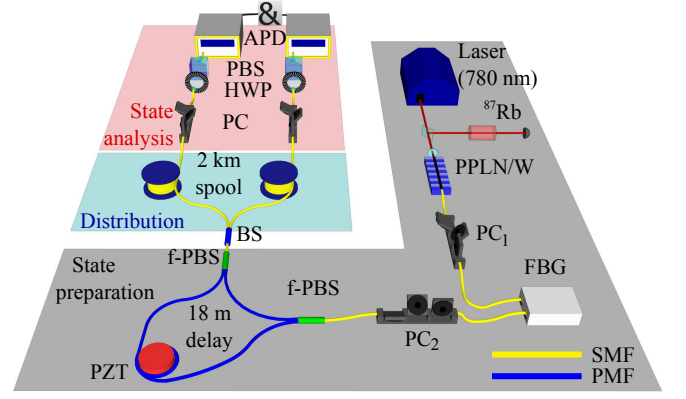


FIG. 2. Schematic of the experimental setup.

by controlling the input state and fine tuning of the delay line length. Furthermore, rotating the polarization of one of the two photons by $\pi/2$ after the BDL allows creating superpositions of $|\Psi^+\rangle$ and $|\Psi^-\rangle$ Bell states.

In FIG. 2 we show how we implement such a BDL when connected to a 4.5 cm long type-0 PPLN/W photon-pair generator pumped with $200 \mu\text{W}$ from a 780 nm CW laser. The phase-matching condition to generate vertically polarized pairs of photons, degenerate at 1560 nm, is obtained by setting the temperature of the PPLN/W to 384 K. The natural emission bandwidth of ~ 3 THz is reduced by a phase-shifted fiber Bragg grating (FBG) filter to 540 MHz, which is comparable to the absorption linewidth of some solid-state quantum memories [25, 26]. The peak transmission is -2.4 dB combined with a side-band rejection of -75 dB. The FBG is easy to implement, when compared to bulk optical cavities, since both frequency stability ($\lesssim 1$ MHz) and accurate tunability are achieved using basic temperature control. A fiber polarization controller (PC_1) is used to adjust the pairs input polarization state so as to avoid fiber birefringence effects and additional losses. Such a filter cannot directly be applied to polarization entangled photons, as birefringence would associate the polarization state with the wavelength observable, therefore reducing the entanglement purity. After the filter, polarization entanglement is created by the BDL, in front of which PC_2 is used to control the input polarization state. This allows choosing the probability amplitudes α and β discussed above. For the following, we set $|\alpha| = |\beta| = \frac{1}{\sqrt{2}}$ by rotating the photons' polarization to the diagonal state ($|D\rangle_1|D\rangle_2$). In the BDL, we take advantage of a fibered configuration, comprising two fiber-PBS and a 18 m PMF loop, leading to a time delay $\delta t = 76$ ns. Here, δt is much greater than both the coherence time of the 540 MHz paired photons (0.8 ns) and the detectors' timing jitter (~ 0.23 ns), preventing temporal overlap between pairs projected onto parallel and cross polarizations. Note that Gaussian and Lorentzian shaped bandwidths down to

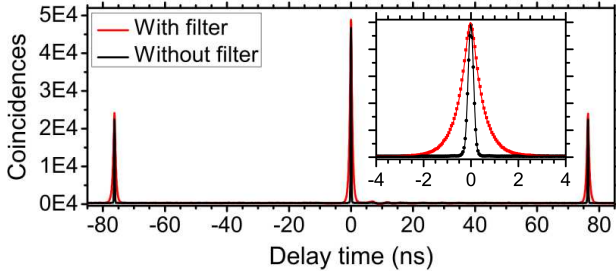


FIG. 3. Temporal photon-pair correlations with (red) and without (black) the FBG. Three well separated coincidence peaks are observed, showing that the BDL is long enough to handle down to 23 MHz narrowband photons.

~ 8 MHz and 23 MHz, respectively, can be handled with such a length of BDL, and could be further extended by increasing it. In SPDC processes, the creation time uncertainty of the pairs is directly related to the coherence time of the pump laser [7]. To ensure that the latter is longer than δt , we stabilize the laser against a hyperfine transition in the D_2 line of ^{87}Rb , leading to a coherence time of around $2\mu\text{s}$. This way, the which-path information is inaccessible, producing properly the entangled state $|\Phi\rangle = \frac{1}{\sqrt{2}}(|H\rangle|H\rangle + e^{i\phi}|V\rangle|V\rangle)$.

To characterize the association of the narrowband photon-pair source and the BDL, we measure the time-dependent second-order intensity correlation function. A 50/50 fiber beam splitter (BS) is used to distribute the pairs between Alice and Bob. Each side comprises an In-GaAs avalanche photodiode (APD) operated in free running, and featuring 25% efficiency and $10^{-6}/\text{ns}$ probability of dark count. A detection event at Alice's (Bob's) determines the start (stop) time of a coincidence measurement apparatus (&). As shown in FIG. 3, three well separated coincidence peaks are obtained with and without the filter. The two outer peaks at $\delta t = \pm 76$ ns correspond to cross polarization contributions which have been split up temporally by the BDL, while the central peak corresponds to the $|H\rangle|H\rangle$ and $|V\rangle|V\rangle$ contributions to the desired entangled state. The central-to-side peak ratio of 2 proves that $|\alpha| = |\beta| = 1/\sqrt{2}$. Without the filter, a sub-picosecond photon coherence time is expected, such that the 231 ps peak width is determined by the convolution of the detectors' timing jitters. With the filter in place, the coherence time of our photons is increased, leading to a peak broadening of 803 ± 27 ps. This corresponds to a frequency bandwidth of 548 ± 18 MHz which is in good agreement with the 540 ± 5 MHz of our filter.

For further analysis, we consider only events in a 1 ns timing window centred around $\delta t = 0$ (see FIG. 3), where we expect only parallel polarization state contributions. To preserve the entanglement coherence, the relative phase fluctuations between the two arms of the BDL need to be kept low. This is ensured by passive temperature stabilization on the BDL and a home-made active

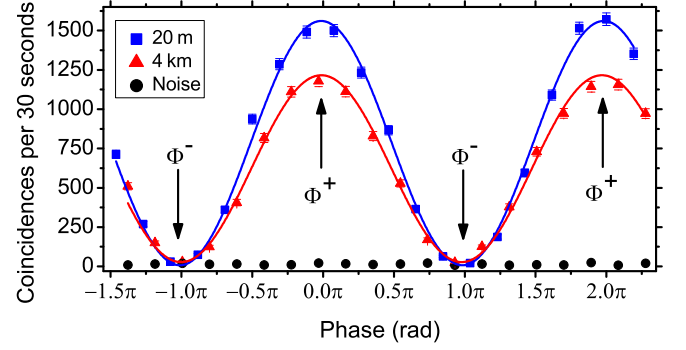


FIG. 4. Entangled quantum state coherence control for 20 m (blue squares) and 4 km (red triangles) of fiber distribution, respectively. The visibilities and associated asymptotic standard errors are estimated using sinusoidal fits (lines).

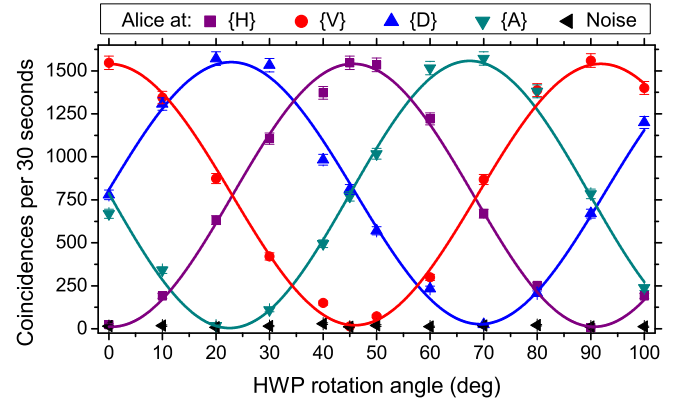


FIG. 5. Violation of the Bell inequalities for 20 m pair distribution for the four standard measurement settings, *i.e.* $|H\rangle$, $|V\rangle$, $|D\rangle$, and $|A\rangle$, at Alice's place.

feedback system comprising a reference laser and a piezo fiber stretcher (PZT). Our system reduces phase fluctuations to $\Delta\phi < 2\pi/100$ on short and long time scales, giving rise to entanglement distortions of less than 0.5%. We now examine the quality of the entanglement produced at the output of the full setup depicted in FIG. 2. For the state analysis, we use a Bell inequality type setup where Alice and Bob consist of a half wave plate (HWP) and a PBS, in addition to their APDs [24]. The first measurement is meant to show both the control and further tuning of the phase ϕ , which is a necessary requirement to prove entanglement with such an analysis system. Alice and Bob fix their HWP at 22.5° to project the entangled state in the phase sensitive diagonal basis $\{D, A\}$. Tuning of ϕ is achieved by changing the optical path length of the PMF loop with the PZT. As shown in FIG. 4, we obtain a sinusoidal modulation of the coincidence rate as a function of ϕ . When distributing the pairs over 20 m we obtain a raw (net) visibility of $99 \pm 1\%$ ($100 \pm 1\%$). To obtain the net visibility, accidental coincidence events due to the dark counts in the detectors are subtracted. The

Group	Generator	Obs.	$\Delta\nu$ (MHz)	λ (nm)	Pairs/(s · mW · MHz) ^(a)	V
[14] Cambridge (2006)	KTP OPO	polar.	22	795	0.7	77%
[17] Geneva (2008)	PPLN/W	time-bin	1200	1560	446	NA ^(b)
[15] Hefei (2008)	PPKTP OPO	polar.	9.6	780	6	97%
[16] Barcelona (2009)	PPKTP	polar.	22	854	3	98%
[18] Geneva (2009)	PPLN/W OPO	time-bin	117	1560	17	94%
[21] Hong Kong (2011)	Rb atoms	polar.	6	780	0.5	89.5%
Nice (this work, 2012)	PPLN/W	polar.	540	1560	306	>99%

TABLE I. Comparison of recent narrowband entangled photon-pair sources sorted by group, generator and arrangement types, observable, spectral bandwidth ($\Delta\nu$), emitted wavelength (λ), normalized brightness, and entanglement visibility (V). ^(a) The brightness is calculated as proposed in Ref. [18], *i.e.*, for entangled photons available after both the filtering procedure and single mode fiber coupling. ^(b) 'NA' doesn't mean the photons are not entangled, but rather that the visibility is not provided.

difference between raw and net visibilities is exceptionally low due to a signal-to-noise ratio (SNR) greater than 100. We also made the same measurement for 4 km pair distribution using standard telecom fibers. We obtain $96\pm 2\%$ ($99\pm 2\%$) raw (net) visibilities. The reduction in the raw visibility comes from additional propagation losses (~ 1.2 dB) which affect the SNR only. Note that our source is capable of easily switching from the $|\Phi^+\rangle$ to the $|\Phi^-\rangle$ Bell states via the PZT. We further prove entanglement via the analysis of the state $|\Phi^-\rangle$, obtained when $\phi = \pi$ in the BDL. In this case, the coincidence rate is measured for four standard analysis settings on Alice's side, *i.e.*, $|H\rangle$, $|V\rangle$, $|D\rangle$, and $|A\rangle$, while Bob's HWP is rotated. For 20 m pair distribution, the obtained raw (net) visibilities are of $98\pm 2\%$ ($99\pm 2\%$) for all the four settings. The Bell parameter is computed to be $S = 2.80 \pm 0.02$, leading to a violation of the Bell inequalities by more than 29 standard deviations. These high visibilities underline the excellent degree of entanglement and phase control achieved with the BDL.

We have utilized a birefringent delay line capable of producing any two-photon polarization entangled state, suitable for handling bandwidth as narrow as several tens of MHz. We applied this scheme to a highly efficient photon-pair generator based on a PPLN/W followed by a 540 MHz filter. As shown in TABLE I, we achieved a normalized source brightness among the highest ever reported for narrowband entangled photon pairs. By the analysis of the maximally entangled state $|\Phi^-\rangle$, the Bell inequalities have been violated by more than 29 standard deviations. Via long term measurements, we have achieved excellent control on the quantum state coherence for more than 24 hours, emphasizing the relevance of our approach. We believe that such a scheme could play a key role in future quantum networks, where narrowband polarization entangled telecom photons are used for distributing entanglement, while coherent frequency converters are employed for final wavelength matching with the desired quantum memories [7, 13].

The authors would like to thank V. D'Auria, A. Kastberg, L. Labonté, M. P. De Micheli, and D. B. Ostrowsky

for their help, R. Frey and I. Zaquine for fruitful discussions, as well as ID Quantique, AOS GmbH, Draka Comteq, and Opton Laser International for technical support. The authors acknowledge the CNRS, the University of Nice - Sophia Antipolis, l'Agence Nationale de la Recherche for the "e-QUANET" project (grant ANR-09-BLAN-0333-01), the European ICT-2009.8.0 FET open program for the "QUANTIP" project (grant 244026), le Ministère de l'Enseignement Supérieur et de la Recherche (MESR), la Direction Générale de l'Armement (DGA), and le Conseil Régional PACA, for financial support.

* sebastien.tanzilli@unice.fr

- [1] W. Tittel and G. Weihs, *Quant. Inf. Comp.* **1**, 3 (2001).
- [2] N. Gisin, G. Ribordy, W. Tittel, and H. Zbinden, *Rev. Mod. Phys.* **74**, 145 (2002).
- [3] P. Aboussouan, O. Alibert, D. B. Ostrowsky, P. Baldi, and S. Tanzilli, *Phys. Rev. A* **81**, 021801 (2010), and references therein.
- [4] N. Sangouard, C. Simon, and H. de Riedmatten, *Rev. Mod. Phys.* **83**, 33 (2011), and references therein.
- [5] J. F. Dynes *et al.*, *Opt. Express* **17**, 11440 (2009).
- [6] C. Simon *et al.*, *Eur. Phys. J. D* **58**, 1 (2010), and references therein.
- [7] S. Tanzilli *et al.*, *Laser & Photonics Rev.* **6**, 140502 (2012).
- [8] T. Wilk *et al.*, *Phys. Rev. Lett.* **104**, 010502 (2010).
- [9] M. Lettner *et al.*, *Phys. Rev. Lett.* **106**, 210503 (2011).
- [10] Y. Kubo *et al.*, *Phys. Rev. Lett.* **105**, 140502 (2010).
- [11] G. B. Xavier *et al.*, *New J. Phys.* **11**, 045015 (2011).
- [12] H. Tanji *et al.*, *Phys. Rev. Lett.* **103**, 043601 (2009).
- [13] Y. O. Dudin *et al.*, *Phys. Rev. Lett.* **105**, 260502 (2010).
- [14] C. E. Kuklewicz, F. N. C. Wong, and J. H. Shapiro, *Phys. Rev. Lett.* **97**, 223601 (2006).
- [15] X.-H. Bao *et al.*, *Phys. Rev. Lett.* **101**, 190501 (2008).
- [16] N. Piro, A. Haase, M. W. Mitchell, and J. Eschner, *J. Phys. B* **42**, 114002 (2009).
- [17] M. Halder *et al.*, *New J. Phys.* **10**, 023027 (2008).
- [18] E. Pomarico *et al.*, *New J. Phys.* **11**, 113042 (2009).
- [19] A. Dousse *et al.*, *Nature* **466**, 217 (2010).
- [20] J. K. Thompson, J. Simon, H. Loh, and V. Vuletić, *Science* **313**, 74 (2006).
- [21] H. Yan *et al.*, *Phys. Rev. Lett.* **106**, 033601 (2011).

- [22] K. Sanaka *et al.*, Phys. Rev. A **66**, 040301 (2002).
- [23] R. T. Thew, S. Tanzilli, W. Tittel, H. Zbinden, and N. Gisin, Phys. Rev. A **66**, 062304 (2002).
- [24] J. B. Altepeter *et al.*, Phys. Rev. Lett. **95**, 033601 (2005), and references therein.
- [25] E. Saglamyurek *et al.*, Nature **469**, 512 (2011).
- [26] C. Clausen *et al.*, Nature **469**, 508 (2011).